
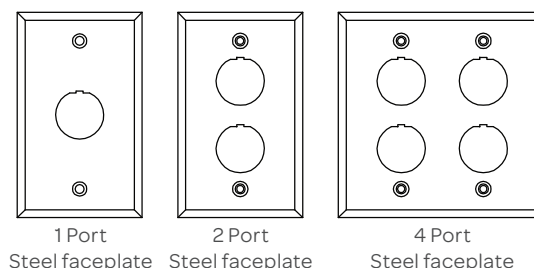



## AT&T OutdoorLine Installation Manual Industrial CAT6 and CAT6A Keystone Jack

AT&T P/N 15A06FV008A & AT&T P/N 15A6AFV008A


### Assembly instructions

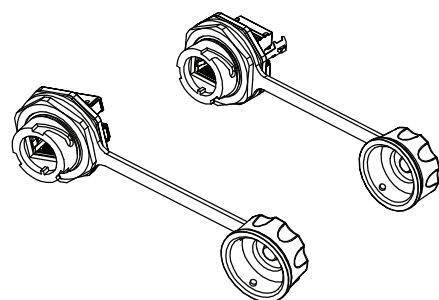



1

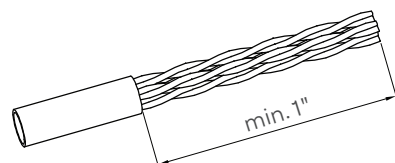

Step 1:  
Strip off at least 1 inch of jacket  
from end of cable.



Blue  
Orange  
Green  
Brown




Step 2:  
Insert wires into IDC's according to  
the desired wiring configuration (T568B/T568A).  
Terminate wires using punch down tool.  
Make sure the tool is set to trim excess  
wire as shown.

Step 3:  
Place termination cap on jack and  
press cap to make sure it is fully seated.

Step 4:  
Adjust the cable to a suitable position  
in the opening of the cap.

3




4



Additional steps below are for shielded components:


5



Step 5:  
Adjust cable to a position parallel to  
the axis of the jack so that the shield  
cover can snap onto the jack properly.


shielded cover

1/2" (12.7 mm) of wire!




6

Step 6:  
Slide the shield cover down onto  
the jack until it snaps onto the  
jack shield.



Step 7-1:  
Thread the tie wrap through the ring on the shielded  
fin as show and tie it firmly. Do not crush the cable!  
Trim off excess.

7



Step 7-2:  
Bend the cable perpendicular  
to the jack and secure the foil  
tape over the opening in the  
cover as shown.

# AT&T OutdoorLine Installation Manual

## Industrial CAT6 and CAT6A Keystone Jack

AT&T P/N 15A06FV008A & AT&T P/N 15A6AFV008A

Assembly instructions (contd.)

