

AT&T FiberLine

Fiber Optic ST/UPC Duplex Singlemode Zip-Cords

Description

This page shows some of the available combinations of AT&T fiber-optic Duplex Singlemode Zip-Cords made with singlemode fibers and terminated with ST/UPC connectors.

Additional combinations can be selected using the information on page B.3.

Fiber type	Select a singlemode fiber from page B.6.
Buffer type	900 μ tight flame retardant LS0H coating
Strength elements	Served aramid and glass yarn
Minicable jacket material	Flame retardant LS0H compound

Standard & EU Directives Conformance


- Relevant sections of ANSI/TIA-568.3-D
- Relevant sections of ISO/IEC 11801
- Relevant sections of EN 50173
- Relevant sections of ANSI/TIA/EIA-604 (FOCIS)
- Relevant sections of IEC 60874
- Relevant sections of IEC 61753
- Relevant sections of IEC 61754
- IEC 60332-1 flame test
- IEC 60754 & IEC 61034
- EU Directive 2011/65/EU (RoHS-2)

Mechanical Properties

Short term bend radius	20xOD mm
Long term bend radius	10xOD mm
Operating temperature	-20 to +60C
Default jacket color	Yellow

Ordering Information

FF: Fiber Type

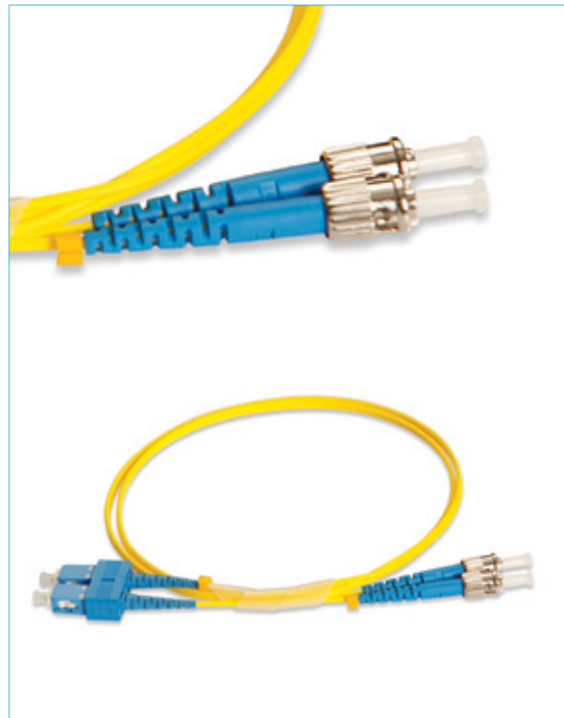

Description	Length m	Cable OD mm	Packaging	P/N
ST/UPC-ST/UPC Duplex Singlemode Zip-Cord LS0H	1	3.0x6.0	1/Bag - 12/Box	28DFFCC010T-YL61
ST/UPC-ST/UPC Duplex Singlemode Zip-Cord LS0H	2	3.0x6.0	1/Bag - 12/Box	28DFFCC020T-YL61
ST/UPC-ST/UPC Duplex Singlemode Zip-Cord LS0H	3	3.0x6.0	1/Bag - 12/Box	28DFFCC030T-YL61
ST/UPC-ST/UPC Duplex Singlemode Zip-Cord LS0H	5	3.0x6.0	1/Bag - 12/Box	28DFFCC050T-YL61
ST/UPC-ST/UPC Duplex Singlemode Zip-Cord LS0H	10	3.0x6.0	1/Bag - 12/Box	28DFFCC100T-YL61
ST/UPC-FC/APC Duplex Singlemode Zip-Cord LS0H	1	3.0x6.0	1/Bag - 12/Box	28DFFCG010T-YL61
ST/UPC-FC/APC Duplex Singlemode Zip-Cord LS0H	2	3.0x6.0	1/Bag - 12/Box	28DFFCG020T-YL61
ST/UPC-FC/APC Duplex Singlemode Zip-Cord LS0H	3	3.0x6.0	1/Bag - 12/Box	28DFFCG030T-YL61
ST/UPC-FC/APC Duplex Singlemode Zip-Cord LS0H	5	3.0x6.0	1/Bag - 12/Box	28DFFCG050T-YL61
ST/UPC-FC/APC Duplex Singlemode Zip-Cord LS0H	10	3.0x6.0	1/Bag - 12/Box	28DFFCG100T-YL61
ST/UPC-LC/APC Duplex Singlemode Zip-Cord LS0H	1	2.0x4.0	1/Bag - 12/Box	28DFFCR010T-YL61
ST/UPC-LC/APC Duplex Singlemode Zip-Cord LS0H	2	2.0x4.0	1/Bag - 12/Box	28DFFCR020T-YL61
ST/UPC-LC/APC Duplex Singlemode Zip-Cord LS0H	3	2.0x4.0	1/Bag - 12/Box	28DFFCR030T-YL61
ST/UPC-LC/APC Duplex Singlemode Zip-Cord LS0H	5	2.0x4.0	1/Bag - 12/Box	28DFFCR050T-YL61
ST/UPC-LC/APC Duplex Singlemode Zip-Cord LS0H	10	2.0x4.0	1/Bag - 12/Box	28DFFCR100T-YL61
ST/UPC-LSH/APC Duplex Singlemode Zip-Cord LS0H	1	2.0x4.0	1/Bag - 12/Box	28DFFCM010T-YL61
ST/UPC-LSH/APC Duplex Singlemode Zip-Cord LS0H	2	2.0x4.0	1/Bag - 12/Box	28DFFCM020T-YL61
ST/UPC-LSH/APC Duplex Singlemode Zip-Cord LS0H	3	2.0x4.0	1/Bag - 12/Box	28DFFCM030T-YL61
ST/UPC-LSH/APC Duplex Singlemode Zip-Cord LS0H	5	2.0x4.0	1/Bag - 12/Box	28DFFCM050T-YL61
ST/UPC-LSH/APC Duplex Singlemode Zip-Cord LS0H	10	2.0x4.0	1/Bag - 12/Box	28DFFCM100T-YL61
ST/UPC-SC/APC Duplex Singlemode Zip-Cord LS0H	1	3.0x6.0	1/Bag - 12/Box	28DFFCK010T-YL61
ST/UPC-SC/APC Duplex Singlemode Zip-Cord LS0H	2	3.0x6.0	1/Bag - 12/Box	28DFFCK020T-YL61
ST/UPC-SC/APC Duplex Singlemode Zip-Cord LS0H	3	3.0x6.0	1/Bag - 12/Box	28DFFCK030T-YL61
ST/UPC-SC/APC Duplex Singlemode Zip-Cord LS0H	5	3.0x6.0	1/Bag - 12/Box	28DFFCK050T-YL61
ST/UPC-SC/APC Duplex Singlemode Zip-Cord LS0H	10	3.0x6.0	1/Bag - 12/Box	28DFFCK100T-YL61
ST/UPC-MTRJ Female Duplex Singlemode Zip-Cord LS0H	1	1.6x3.2	1/Bag - 12/Box	28DFFCT010T-YL61
ST/UPC-MTRJ Female Duplex Singlemode Zip-Cord LS0H	2	1.6x3.2	1/Bag - 12/Box	28DFFCT020T-YL61
ST/UPC-MTRJ Female Duplex Singlemode Zip-Cord LS0H	3	1.6x3.2	1/Bag - 12/Box	28DFFCT030T-YL61
ST/UPC-MTRJ Female Duplex Singlemode Zip-Cord LS0H	5	1.6x3.2	1/Bag - 12/Box	28DFFCT050T-YL61
ST/UPC-MTRJ Female Duplex Singlemode Zip-Cord LS0H	10	1.6x3.2	1/Bag - 12/Box	28DFFCT100T-YL61

Optional Transmission Properties - UPC Connectors

Suffix	Connector IL (dB)	Connector RL (dB)
T = Standard Loss connector	0.30 max. 0.20 Typical	26 min. 60 Typical
S = Low-Loss connector	0.15 max. 0.10 Typical	26 min. 60 Typical