

AT&T FiberLine


Fiber Optic SC Connectors

Description

Fiber Optic Connectors Type SC
 Durability 0.2dB max. change after 1000 mating cycles
 Temperature range -20 to +60C
 Typical Insertion loss <0.2dB
 Connector Ferrule type Ceramic

Standard & EU Directives Conformance

- Relevant sections of ANSI/TIA/EIA-604 (FOCIS)
- Relevant sections of IEC 60874
- Relevant sections of IEC 61753
- Relevant sections of IEC 61754
- EU Directive 2011/65/EU (RoHS-2)

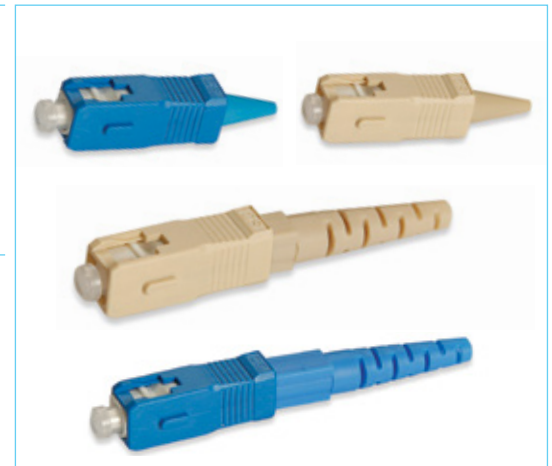

Notes:

- Each product has a full-length P/N that can be used as ordering information.
- Each connector has a single letter code that can be used to build fiber-optic cords and pigtails part-numbers.
- The default colors are indicated in this page. Other options available.
- Each bag contains one connector and two colored boots: 0.9mm & 3.0mm.

Ordering Information - Connectors

Type	Compatible Fiber	Formation	Body Color	Boot Color	Code	Packaging	P/N
SC/UPC Connector	Multimode	Single	Beige	Beige	H	1/Bag 120/Box	29CM1NV001H-BG61
SC/UPC Connector	Singlemode	Single	Blue	Blue	J	1/Bag 120/Box	29CS1NV001J-PB61
SC/APC Connector	Singlemode	Single	Green	Green	K	1/Bag 120/Box	29CS1NV001K-GN61
SC/UPC Connector	Multimode	Double	Beige	Red & Black	H	1/Bag 120/Box	29CM1NV002H-BG61
SC/UPC Connector	Singlemode	Double	Beige	Blue	J	1/Bag 120/Box	29CS1NV002J-PB61
SC/APC Connector	Singlemode	Double	Green	Green	K	1/Bag 120/Box	29CS1NV002K-GN61

Ordering Information - Clips

Type	Color	Packaging	P/N
Duplex Clip for SC/UPC Multimode Connector	Beige	120/Bag	531M1NV002H-BG6Y
Duplex Clip for SC/UPC Singlemode Connector	Blue	120/Bag	531S1NV002J-PB6Y
Duplex Clip for SC/APC Singlemode Connector	Green	120/Bag	531S1NV002K-GN6Y