


AT&T FiberLine

Fiber Optic LSH Connectors

Description

Fiber Optic Connectors Type LSH (E-2000™)	
Durability	0.2dB max. change after 1000 mating cycles
Temperature range	-20 to +60C
Typical Insertion loss	<0.2dB
Ferrule type	Ceramic

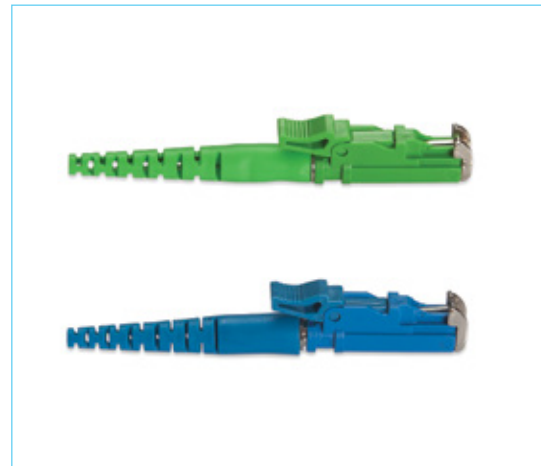

Standard & EU Directives Conformance

- Relevant sections of ANSI/TIA/EIA-604 (FOCIS)
- Relevant sections of IEC 60874
- Relevant sections of IEC 61753
- Relevant sections of IEC 61754
- EU Directive 2011/65/EU (RoHS-2)

Notes:

- Each product has a full-length P/N that can be used as ordering information.
- Each connector has a single letter code that can be used to build fiber-optic cords and pigtailed part-numbers.
- The default colors are indicated in this page. Other options available.
- Each bag contains one connector and two colored boots: 0.9mm & 3.0mm.
- E-2000 is a trademark of Diamond SA, Switzerland.

Ordering Information - Connectors

Description	Compatible Fiber	Formation	Body Color	Boot/Cover Color	Code	Packaging	P/N
LSH/UPC Connector	Multimode	Single	Beige	Beige	D	1/Bag 120/Box	29CM1NV001D-BG61
LSH/UPC Connector	Singlemode	Single	Blue	Blue	L	1/Bag 120/Box	29CS1NV001L-BL61
LSH/APC Connector	Singlemode	Single	Green	Green	M	1/Bag 120/Box	29CS1NV001M-GN61
LSH/UPC Connector	Multimode	Double	Beige	Beige	D	1/Bag 120/Box	29CM1NV002D-BG61
LSH/UPC Connector	Singlemode	Double	Blue	Blue	L	1/Bag 120/Box	29CS1NV002L-BL61
LSH/APC Connector	Singlemode	Double	Green	Green	M	1/Bag 120/Box	29CS1NV002M-GN61

Ordering Information - Clips

Description	Color	Packaging	P/N
Duplex Clip for LSH/UPC Multimode Connector	Beige	120/Bag	531M1NV002D-BG6Y
Duplex Clip for LSH/UPC Singlemode Connector	Blue	120/Bag	531S1NV002L-BL6Y
Duplex Clip for LSH/APC Singlemode Connector	Green	120/Bag	531S1NV002M-GN6Y