

## AT&T CopperLine Category 5e

### U/UTP 100 Ohm Indoor Flexible LAN Cables

#### Description


4 pair U/UTP flexible cables	
Frequency range	1-100 MHz
Conductor	24 AWG 7x0.20mm stranded bare copper
Insulation	PO
Color code	ANSI/TIA-568.2-D
Shield	None
Jacket	PVC or LSOH

#### Standard & EU Directives Conformance

- Category 5e work area cable according to IEC 61156-6
- Category 5e cord cable according to ANSI/TIA-568.2-D
- 100MHz work area cable according to EN 50288-3-2
- IEC 60332-1 flame test
- IEC 60754 & IEC 61034 (LSOH cables)
- EU Directive 2011/65/EU (RoHS-2)

#### Mechanical & Electrical Properties

Pulling force	50 N/mm <sup>2</sup> max.
Short term bend radius	8xOD mm
Long term bend radius	4xOD mm
Operating temperature	-20 to +60C
Installation temperature	0 to +50C
DC resistance	93 Ohm/km max.
Capacitance	56 pF/m max. @ 1kHz
Voltage rating	72 Vdc max.
Velocity of propagation (NVP)	69% nom.

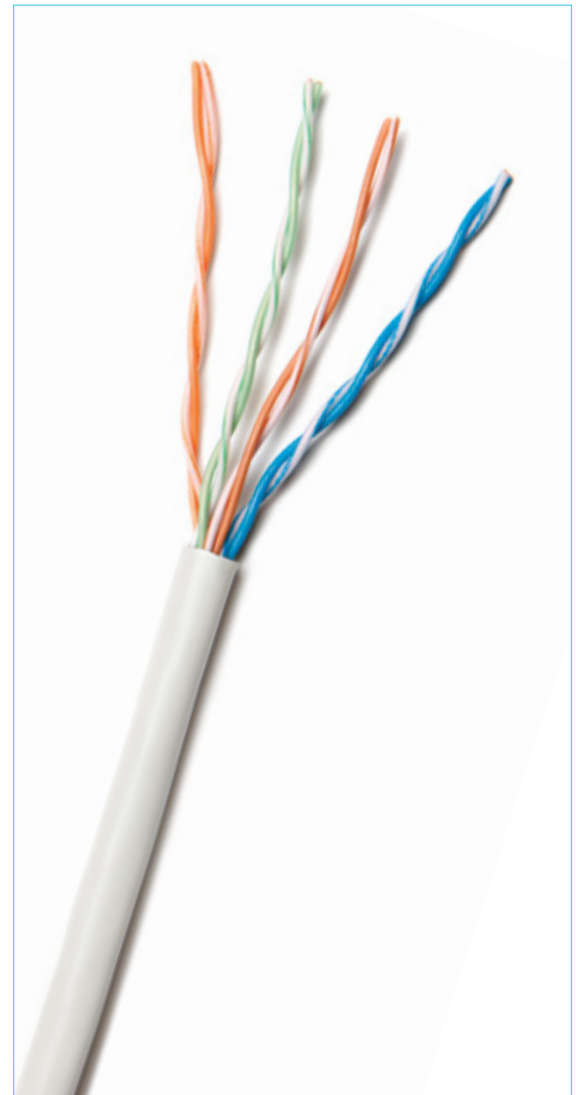

#### Ordering Information

Description	OD mm	Weight kg/km	Packaging	P/N
4-Pair 24 AWG U/UTP CAT5e PVC IEC 60332-1 Flexible Cable Gray	5.3	32	500m Drum	12U5EVA004N-GY2K
4-Pair 24 AWG U/UTP CAT5e LSOH IEC 60332-1 Flexible Cable Gray	5.3	32	500m Drum	12U5EHA004N-GY2K
4-Pair 24 AWG U/UTP CAT5e PVC IEC 60332-1 Flexible Cable Gray	5.3	32	1000m Drum	12U5EVA004N-GY2L
4-Pair 24 AWG U/UTP CAT5e LSOH IEC 60332-1 Flexible Cable Gray	5.3	32	1000m Drum	12U5EHA004N-GY2L