

AT&T CopperLine Category 6 F/UTP 100 Ohm Indoor Flexible LAN Cables

Description


4 pair F/UTP flexible cables	
Frequency range	1-250 MHz
Conductor	26 AWG 7x0.16mm stranded bare copper
Insulation	PO
Color code	ANSI/TIA-568.2-D
Shield	Overall aluminum foil
Drain wire	Single tin-coated copper stranded wire
Jacket	PVC or LSOH

Standard & EU Directives Conformance

- Category 6 work area cable according to IEC 61156-6
- Category 6 cord cable according to ANSI/TIA-568.2-D
- 250MHz work area cable according to EN 50288-5-2
- IEC 60332-1 flame test
- IEC 60754 & IEC 61034 (LSOH cables)
- EU Directive 2011/65/EU (RoHS-2)

Mechanical & Electrical Properties

Pulling force	50 N/mm ² max.
Short term bend radius	8xOD mm
Long term bend radius	4xOD mm
Operating temperature	-20 to +60C
Installation temperature	0 to +50C
DC resistance	150 Ohm/km max.
Capacitance	56 pF/m max. @ 1kHz
Voltage rating	72 Vdc max.
Velocity of propagation (NVP)	69% nom.

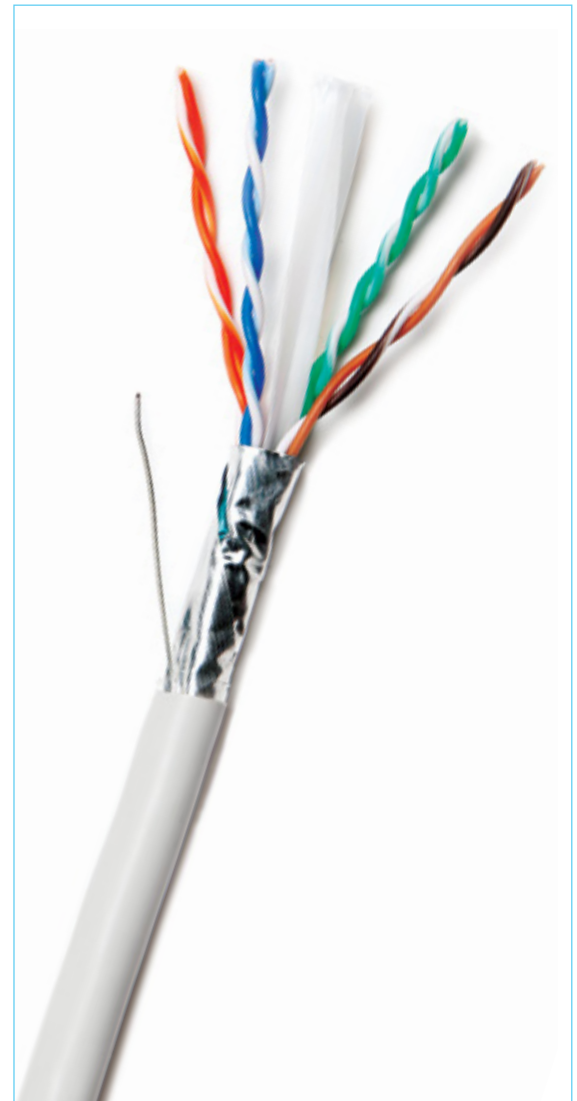

Ordering Information

Description	OD mm	Weight kg/km	Packaging	P/N
4-Pair 26 AWG F/UTP CAT6 PVC IEC 60332-1 Flexible Cable Gray	6.3	40	500m Drum	12P06VA004N-GY2K
4-Pair 26 AWG F/UTP CAT6 LSOH IEC 60332-1 Flexible Cable Gray	6.3	40	500m Drum	12P06HA004N-GY2K
4-Pair 26 AWG F/UTP CAT6 PVC IEC 60332-1 Flexible Cable Gray	6.3	40	1000m Drum	12P06VA004N-GY2L
4-Pair 26 AWG F/UTP CAT6 LSOH IEC 60332-1 Flexible Cable Gray	6.3	40	1000m Drum	12P06HA004N-GY2L